

36 SERIES

RFI/EMI CABLE SEALING ADAPTOR


INTERFACE: D

TO FIT TYPICAL CONNECTOR: MIL-DTL-26482 SER I, PATT 105, PATT 603

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

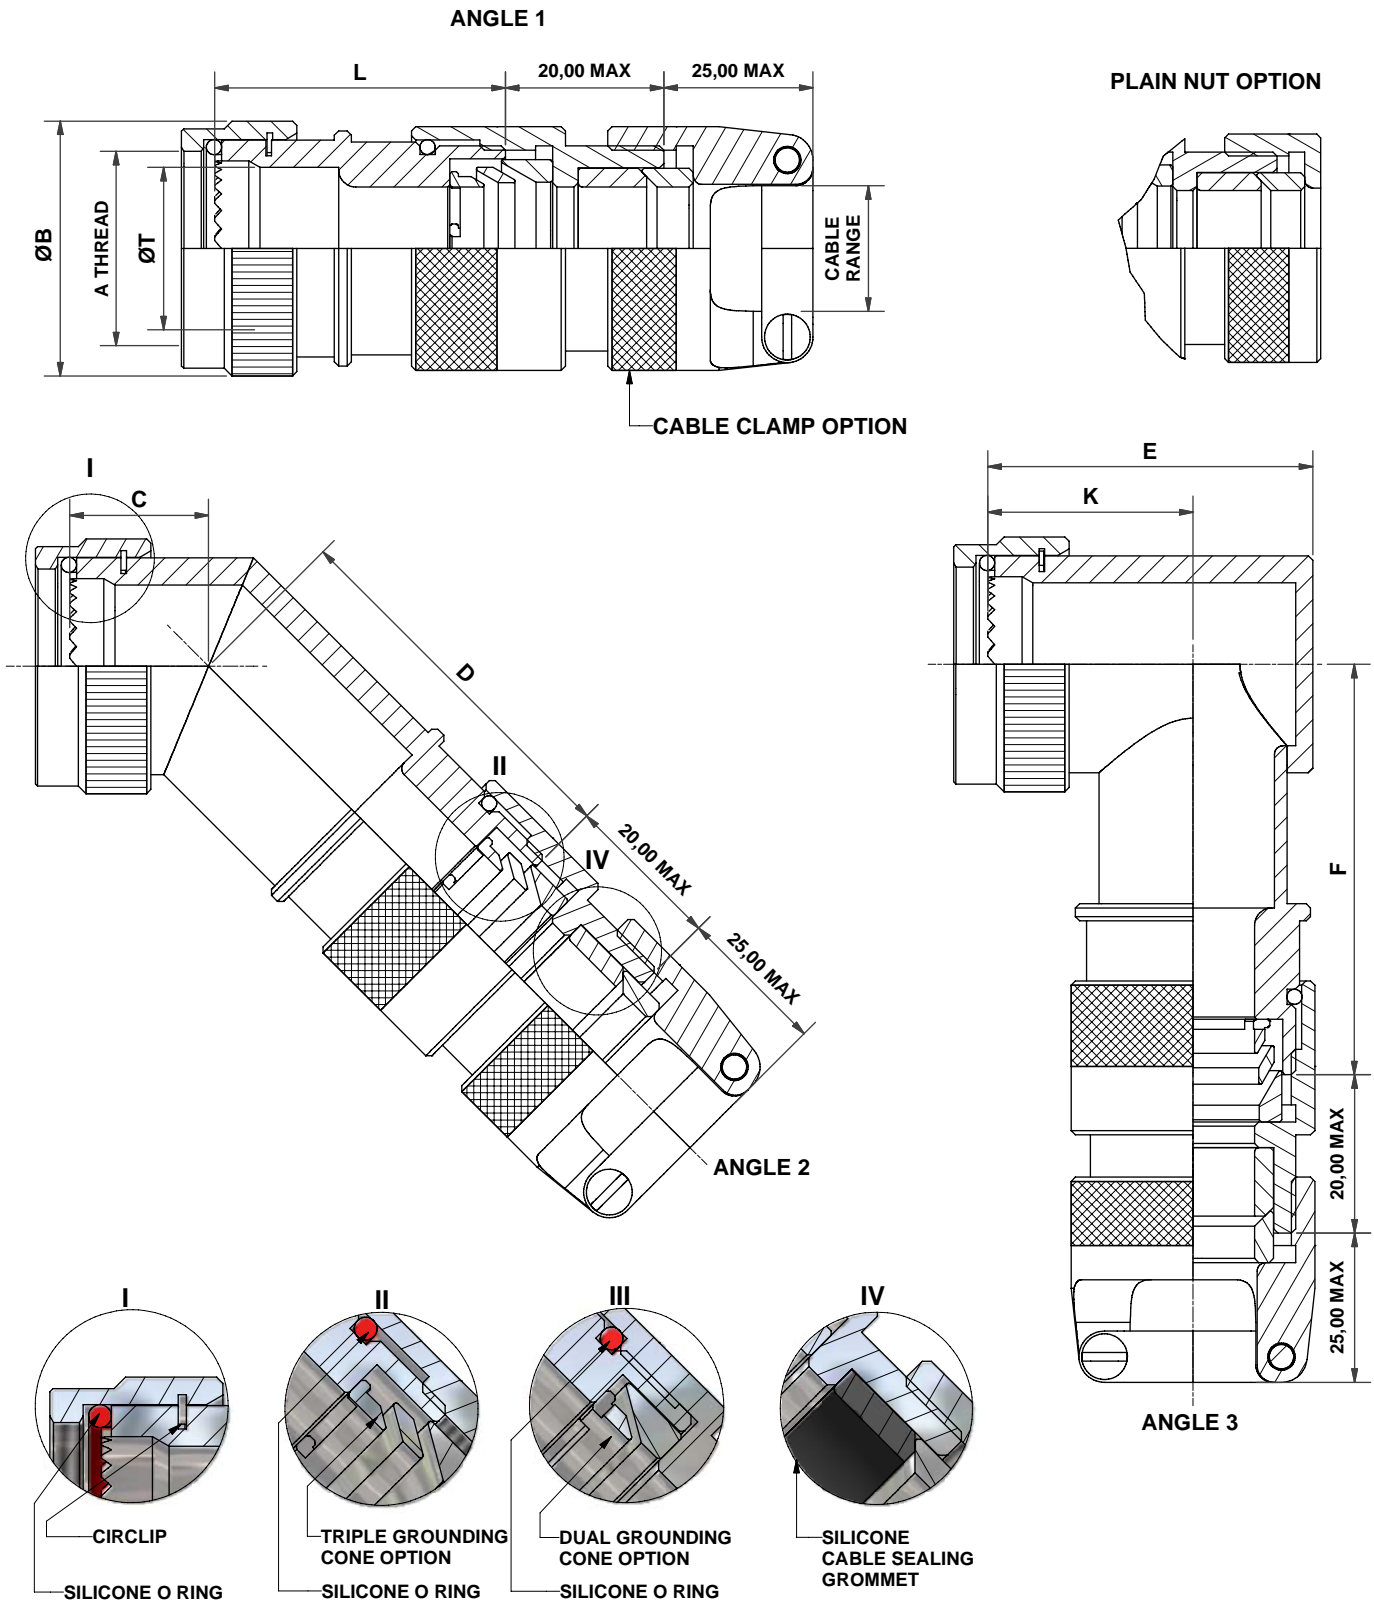

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792



36 SERIES

RFI/EMI CABLE SEALING ADAPTOR

INTERFACE: D

TO FIT TYPICAL CONNECTOR: MIL-DTL-26482 SER I, PATT 105, PATT 603

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

EXAMPLE PART NUMBER	36	D	1	- 16	- 08	- 1	- C	- CC	- L3	- T
SERIES										
CONNECTOR INTERFACE										
ANGLE										
SHELL SIZE (TABLE 1)										
ENTRY SIZE (TABLE 2)										
MATERIAL (1-ALUMINIUM ALLOY)										
PLATING (TABLE 3)										
CABLE CLAMP OPTION										
LENGTH CODE (STRAIGHT ONLY) (1/2" INCREMENTS, MINIMUM L2 (= 1")) (D-DUAL CONE, T-TRIPLE CONE)										
GROUNDING CONE OPTION										

SHELL SIZE	A THREAD	B MAX	T MIN	MAX ENTRY	C MAX	D MAX	E MAX	F MAX	K +/- 0,5
08	7/16-28 UNEF	17,3	7,2	-	14,1	35,8	25,2	36,1	17,5
10	9/16-24 UNEF	20,3	9,8	04	14,9	37,3	28,2	39,1	18,6
12	11/16-24 UNEF	23,8	13,5	06	15,3	38,9	31,7	39,6	20,5
14	13/16-20 UNEF	26,8	15,9	10	16,2	41,1	35,2	41,4	22,5
16	15/16-20 UNEF	29,8	19,0	12	16,5	43,9	38,2	48,0	24,0
18	1 1/16-18 UNEF	33,3	21,4	12	17,3	48,8	41,7	50,8	26,0
20	1 3/16-18 UNEF	36,3	24,6	16	18,2	50,1	45,2	50,8	28,0
22	1 5/16-18 UNEF	39,8	27,8	16	18,5	52,6	48,2	50,8	29,5
24	1 7/16-18 UNEF	42,8	31,0	16	19,4	54,0	51,2	50,8	31,0

ENTRY SIZE	CABLE RANGE
04	3,2 - 7,9
06	6,4 - 11,1
08	9,8 - 14,3
10	8,9 - 15,9
12	12,7 - 19,1
16	15,9 - 23,8
20	22,2 - 31,8
24	25,4 - 34,9
28	31,8 - 41,3
32	36,5 - 47,6

CODE	PLATING
B	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
C	ELECTROLESS NICKEL
ZB	ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL

LIST NOT EXHAUSTIVE - FOR COMPREHENSIVE LIST AND SPECS SEE WEBSITE

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792

