


SHELL SIZE	A THREAD	B MAX	C MAX	D MAX	E MAX	F MAX	L MAX
03	$\frac{9}{16}$ -24UNEF	17,0	17,0	25,1	26,6	26,4	36,0
08	$\frac{1}{2}$ -20UNF	15,6	16,8	24,9	24,7	25,8	36,0
10	$\frac{5}{8}$ -24UNEF	18,6	17,0	25,7	26,7	27,5	36,0
12	$\frac{3}{4}$ -20UNEF	21,7	17,5	26,1	29,2	29,0	36,0
14	$\frac{7}{8}$ -20UNEF	24,9	18,3	26,9	30,7	30,6	36,0
16	1-20UNEF	28,2	19,2	27,7	34,2	32,2	36,0
18	$1\frac{1}{16}$ -18UNEF	30,9	19,4	28,5	37,2	32,9	36,0
20	$1\frac{3}{16}$ -18UNEF	34,1	20,3	29,3	42,2	34,5	36,0
22	$1\frac{5}{16}$ -18UNEF	37,3	20,5	29,6	44,2	36,1	36,0
24	$1\frac{7}{16}$ -18UNEF	40,4	22,0	30,5	45,2	37,6	36,0
28	$1\frac{3}{4}$ -18UNS	50,0	23,5	30,5	54,4	42,3	36,0
32	2-18UNS	56,3	25,2	32,2	60,9	45,6	40,0
36	$2\frac{1}{4}$ -16UN	62,7	26,4	33,4	67,4	48,8	45,0
40	$2\frac{1}{2}$ -16UN	69,0	28,8	34,6	73,4	51,8	50,5
44	$2\frac{3}{4}$ -16UN	75,4	30,3	36,3	79,7	55,0	50,5
48	3-16UN	81,7	31,5	37,5	86,0	58,1	50,5
61	$1\frac{1}{2}$ -18UNEF	42,0	22,3	29,9	48,0	39,1	28,0

ENTRY SIZE	G	H MAX
03	4,77	16,8
04	6,35	18,8
05	7,92	20,4
06	9,52	22,0
07	11,12	23,5
08	12,70	25,0
09	14,27	26,7
10	15,88	28,3
11	17,47	30,0
12	19,05	31,5
13	20,62	33,0
14	22,23	34,7
15	23,82	36,4
16	25,40	37,8
18	28,57	39,4
20	31,80	44,2
22	34,90	47,3
24	38,10	50,9

NOTE:  
NON-STANDARD LENGTHS AVAILABLE FOR  
STRAIGHT ADAPTORS ONLY. PLEASE  
CONSULT FACTORY

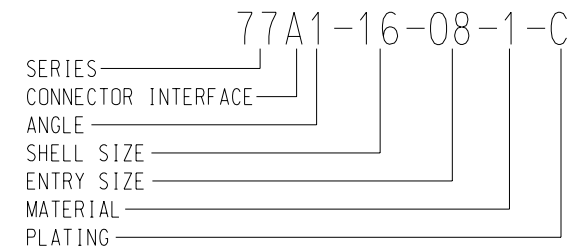

STRAIN  
RELIEF  
ADAPTOR

SERIES 77  
TO FIT CONNECTOR CODE A

THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF  
POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR  
MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN  
CONSENT OF THE COMPANY



POLAMCO LTD WESTON LOCK  
LOWER BRISTOL ROAD  
BATH BA2 1EP