


SHELL SIZE	A THREAD	B MAX	C MAX	D MAX	E MAX	F MAX	L MAX
08	1/16 -28UNEF	18,0	18,7	26,1	23,1	26,4	31,4
10	1/2 -28UNEF	19,5	20,0	26,8	24,6	27,3	31,4
11	9/16 -24UNEF	21,0	19,3	26,9	26,6	28,2	31,4
12	5/8 -24UNEF	23,0	19,8	27,0	28,1	29,0	31,4
14	3/4 -20UNEF	26,0	20,7	27,7	32,6	31,2	31,4
16	7/8 -20UNEF	30,5	21,4	29,0	36,1	32,9	31,4
18	1 -20UNEF	34,0	22,0	29,3	39,1	34,5	31,4
20	1 1/8 -18UNEF	37,0	22,7	30,1	42,6	36,1	31,4
22	1 1/4 -18UNEF	40,0	23,3	30,5	45,6	37,6	31,4
24	1 3/8 -18UNEF	43,5	23,9	30,9	48,6	39,1	31,4
28	1 5/8 -18UNEF	50,0	25,0	30,9	53,6	41,6	37,4
32	1 7/8 -16UN	56,0	27,7	33,0	60,0	44,8	41,4
36	2 1/8 -16UN	64,0	29,0	34,5	69,6	49,6	46,4
40	2 3/8 -16UN	68,5	31,5	35,6	74,1	51,8	51,9

ENTRY SIZE	G	H MAX
03	4,77	16,8
04	6,35	18,8
05	7,92	20,4
06	9,52	22,0
07	11,12	23,5
08	12,70	25,0
09	14,27	26,7
10	15,88	28,3
11	17,47	30,0
12	19,05	31,5
13	20,62	33,0
14	22,23	34,7
15	23,82	36,4
16	25,40	37,8
18	28,57	39,4
20	31,80	44,2
22	34,90	47,3
24	38,10	50,9

NOTE:
NON-STANDARD LENGTHS AVAILABLE FOR
STRAIGHT ADAPTORS ONLY. PLEASE
CONSULT FACTORY

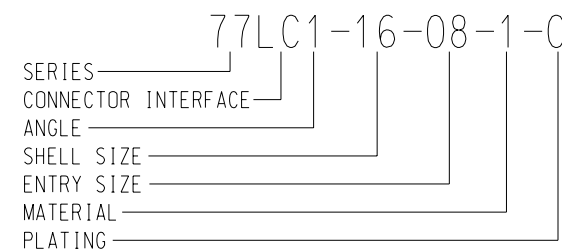

STRAIN
RELIEF
ADAPTOR

SERIES 77
TO FIT CONNECTOR CODE LC

THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF
POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR
MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN
CONSENT OF THE COMPANY



POLAMCO LTD

WESTON LOCK
LOWER BRISTOL ROAD
BATH BA2 1EP