


SHELL SIZE	A THREAD	B MAX	C MAX	D MAX	E MAX	F MAX
12	5/8 -24UNEF	20.3	15.7	30.9	25.2	27.3
14	3/4 -20UNEF	23.7	16.7	31.5	29.2	28.2
16	7/8 -20UNEF	26.7	24.4	32.0	32.2	29.8
18	1 -20UNEF	30.3	25.1	32.4	35.2	31.3
20	1 1/8 -18UNEF	35.3	25.6	33.1	38.2	34.5
22	1 1/4 -18UNEF	38.3	26.4	33.8	41.2	34.5
24	1 3/8 -18UNEF	41.3	27.6	34.4	44.2	36.2
28	1 5/8 -18UNEF	47.8	29.3	35.6	51.3	38.3
32	1 7/8 -16UN	54.2	30.2	36.9	58.2	42.5
36	2 1/16 -16UNS	62.2	31.7	37.7	63.2	45.2

ENTRY SIZE	G	H MAX
03	4.77	16.8
04	6.35	18.8
05	7.92	20.4
06	9.52	22.0
07	11.12	23.5
08	12.70	25.0
09	14.27	26.7
10	15.88	28.3
11	17.47	30.0
12	19.05	31.5
13	20.62	33.0
14	22.23	34.7
15	23.82	36.4
16	25.40	37.8
18	28.57	39.4
20	31.80	44.2
22	34.90	47.3
24	38.10	50.9

NOTE:
NON-STANDARD LENGTHS AVAILABLE FOR
STRAIGHT ADAPTORS ONLY. PLEASE
CONSULT FACTORY

NOTE:
FOR ENVIRONMENTAL SEALING
PLEASE USE GROMMET ABB-**-**-GAC
(SUPPLIED BY AB CONNECTORS)

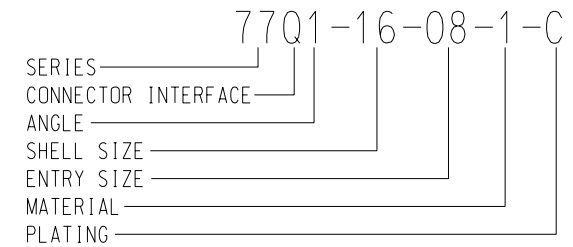

STRAIN RELIEF ADAPTOR	SERIES 77 TO FIT CONNECTOR CODE 0
	THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN CONSENT OF THE COMPANY
POLAMCO LTD	
WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	