


SHELL SIZE	A THREAD	B MAX	C MAX	D MAX	E MAX	F MAX
08	1/2 -28UNEF	21,6	19,2	26,7	32,2	26,1
10	5/8 -28UNEF	24,8	19,5	26,8	34,0	27,0
14	7/8 -28UNEF	31,1	21,0	28,4	40,7	30,3
16	1 -28UNEF	34,3	21,7	33,3	44,0	32,0
18	1 1/8 -28UNEF	37,5	22,4	33,6	47,2	33,6
20	1 1/4 -28UNEF	40,6	23,0	36,0	50,2	35,1
22	1 3/8 -28UNEF	43,8	23,3	36,7	51,7	35,8
24	1 1/2 -28UNEF	47,0	24,2	37,4	55,2	37,6

ENTRY SIZE	G	H MAX
03	4,77	16,8
04	6,35	18,8
05	7,92	20,4
06	9,52	22,0
07	11,12	23,5
08	12,70	25,0
09	14,27	26,7
10	15,88	28,3
11	17,47	30,0
12	19,05	31,5
13	20,62	33,0
14	22,23	34,7
15	23,82	36,4
16	25,40	37,8
18	28,57	39,4
20	31,80	44,2
22	34,90	47,3
24	38,10	50,9

NOTE:
NON-STANDARD LENGTHS AVAILABLE FOR
STRAIGHT ADAPTORS ONLY. PLEASE
CONSULT FACTORY

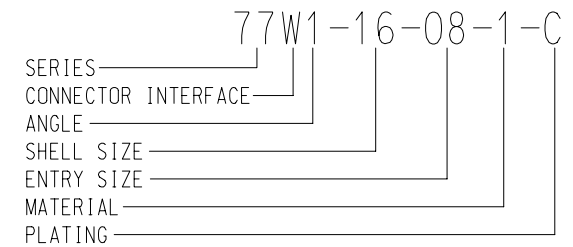

STRAIN RELIEF ADAPTOR	SERIES 77 TO FIT CONNECTOR CODE W
	THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN CONSENT OF THE COMPANY
 POLAMCO LTD	
WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	