


SHELL SIZE	A THREAD	B MAX	C MAX	D MAX	E MAX	F MAX
11	3/4 -24UNEF	26,5	20,2	26,4	31,7	26,8
13	7/8 -20UNEF	29,7	21,3	27,3	34,8	28,3
15	1 -20UNEF	31,3	21,7	27,6	37,2	29,8
17	1 1/8 -18UNEF	35,5	21,7	28,7	40,0	30,9
19	1 1/4 -18UNEF	38,7	22,5	34,0	43,3	32,6
23	1 7/16 -18UNEF	43,6	23,1	35,8	48,7	35,6
25	1 9/16 -18UNEF	47,2	24,1	36,3	51,5	36,7
29	1 7/8 -16UN	55,2	26,2	36,0	58,5	39,8
33	2 1/16 -16UN	60,5	27,2	36,0	63,4	42,3

ENTRY SIZE	G	H MAX
03	4,77	16,8
04	6,35	18,8
05	7,92	20,4
06	9,52	22,0
07	11,12	23,5
08	12,70	25,0
09	14,27	26,7
10	15,88	28,3
11	17,47	30,0
12	19,05	31,5
13	20,62	33,0
14	22,23	34,7
15	23,82	36,4
16	25,40	37,8
18	28,57	39,4
20	31,80	44,2
22	34,90	47,3
24	38,10	50,9

NOTE:
NON-STANDARD LENGTHS AVAILABLE FOR
STRAIGHT ADAPTORS ONLY. PLEASE
CONSULT FACTORY

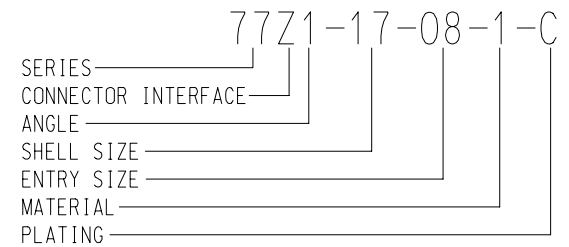

STRAIN RELIEF ADAPTOR	SERIES 77 TO FIT CONNECTOR CODE Z
	THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN CONSENT OF THE COMPANY
 POLAMCO LTD	
WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	