



SLOTTED HEAD SCREW OPTION

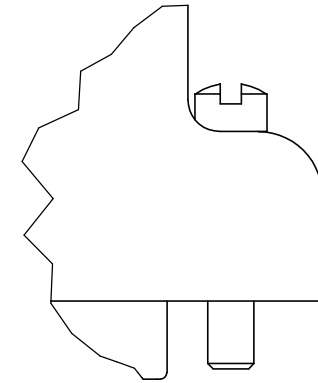

SHELL SIZE	A	B	C	D THREAD	E	F	G	MAX ENTRY
09	23,0	9,6	14,35	2-56	16,7	27,8	4,1	05
15	26,8	9,6	18,16	2-56	18,2	29,3	4,8	06
21	30,6	9,6	21,97	2-56	19,1	30,2	5,6	09
25	33,2	9,6	24,51	2-56	20,6	31,7	6,6	11
31	37,0	9,6	28,32	2-56	21,4	32,5	7,0	14
37	40,8	9,6	32,13	2-56	23,0	34,1	7,2	16
51	39,5	10,7	30,86	2-56	24,6	35,7	8,9	16
100	58,0	13,7	45,72	4-40	26,2	37,3	12,4	16

ENTRY SIZE	H
04	6,4
05	7,9
06	9,5
07	11,1
08	12,7
09	14,3
10	15,9
11	17,5
12	19,1
13	20,6
14	22,2
15	23,8
16	25,4

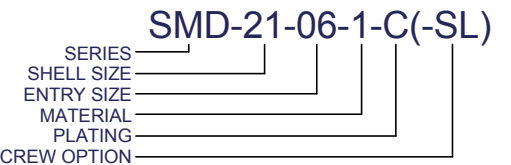

SPLIT MICRO -MIN BACKSHELL	<b>SMD TYPE</b>
	TO FIT MIL-C-83513
THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN CONSENT OF THE COMPANY	
	<b>POLAMCO LTD</b> WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP