


BAND REF.


B - STANDARD BAND
OMIT FOR NO BAND REQUIRED



SHELL SIZE	A THREAD	B MAX	C MAX	D MAX	E MAX	F MAX
08	7/16 -28UNEF	18,3	16,6	50,0	22,7	49,9
10	9/16 -24UNEF	21,5	17,4	41,4	26,2	51,7
12	11/16 -24UNEF	24,5	17,8	51,8	29,2	53,2
14	13/16 -20UNEF	27,8	18,7	52,7	32,2	54,7
16	15/16 -20UNEF	30,8	20,4	53,5	35,7	56,4
18	1 1/16 -18UNEF	34,1	19,8	53,6	39,7	58,0
20	1 3/16 -18UNEF	37,3	20,6	54,5	42,2	59,6
22	1 5/16 -18UNEF	40,5	21,0	55,0	45,2	61,1
24	1 7/16 -18UNEF	43,7	21,9	55,7	48,2	62,6

ENTRY SIZE	G	H MAX
03	4,77	17,2
04	6,35	18,8
05	7,92	20,4
06	9,52	22,0
07	11,13	23,5
08	12,70	25,0
09	14,27	26,7
10	15,88	28,3
11	17,47	30,0
12	19,05	31,5
13	20,62	33,0
14	22,23	34,7
15	23,82	36,4
16	25,40	37,8
17	27,00	39,4
18	28,60	41,0
19	30,20	42,6
20	31,80	44,2
21	33,38	45,8
22	35,00	47,3
23	36,58	50,9
24	38,10	50,9

NOTE:
NON-STANDARD LENGTHS AVAILABLE FOR
STRAIGHT ADAPTORS ONLY. PLEASE
CONSULT FACTORY

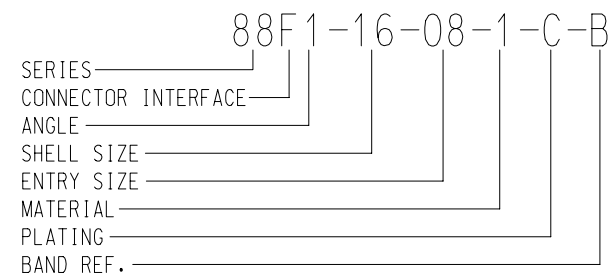

BAND IN A CAN ADAPTOR	SERIES 88 TO FIT CONNECTOR CODE F
	THIS DRAWING IS THE COPYRIGHT AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT WRITTEN CONSENT OF THE COMPANY
	WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP