

63 SERIES CONDUIT ADAPTOR

INTERFACE: F


TO FIT TYPICAL CONNECTOR: MIL-DTL-38999 SERIES I & II

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

SUITABLE FOR USE WITH 100P2589 SERIES CONDUIT

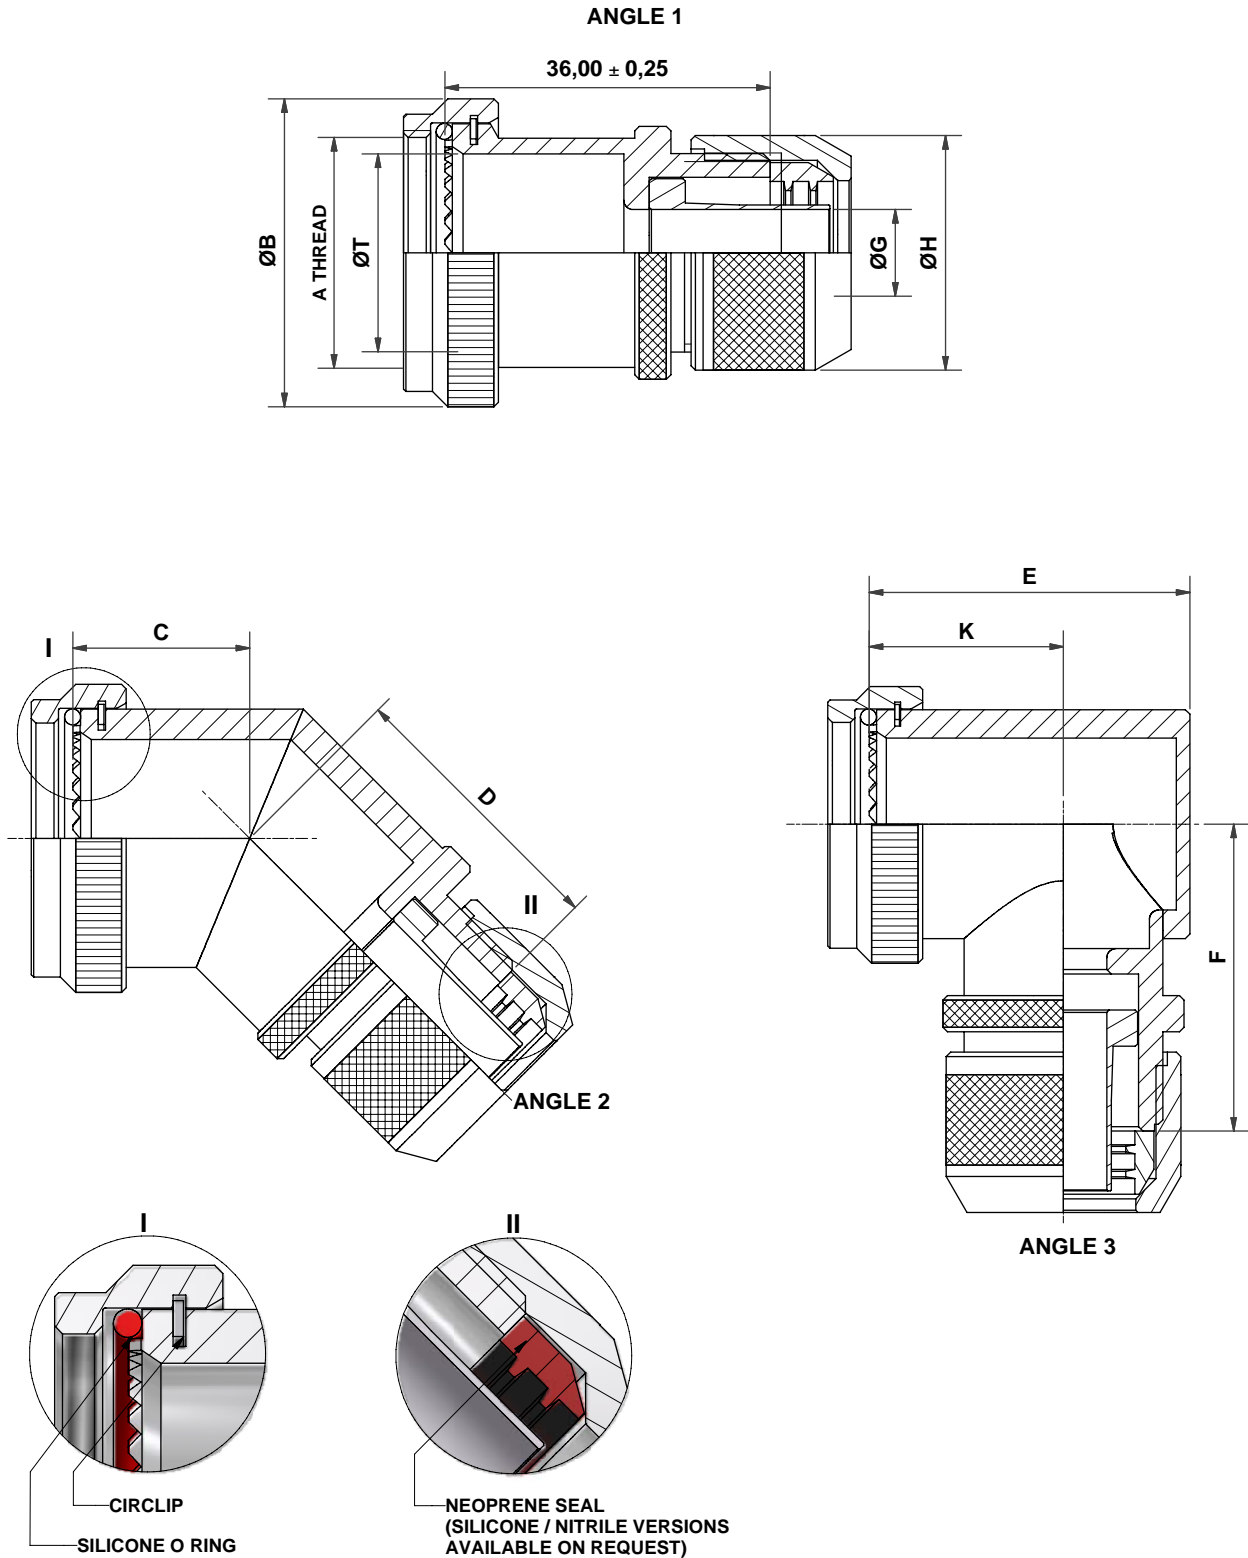

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792



63 SERIES CONDUIT ADAPTOR

INTERFACE: F

TO FIT TYPICAL CONNECTOR: MIL-DTL-38999 SERIES I & II

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

EXAMPLE PART NUMBER	63	F	1	- 18	- 16	- 1	- C
	SERIES						
	CONNECTOR INTERFACE						
	ANGLE						
	SHELL SIZE (TABLE 1)						
	CONDUIT SIZE (TABLE 2)						
	MATERIAL (1-ALUMINIUM ALLOY)						
	PLATING (TABLE 3)						

SHELL SIZE		A	B	T	C	D	E	F	K
SERIES I	SERIES II	THREAD	MAX	MIN	MAX	MAX	MAX	MAX	+/- 0,5
9	8	7/16-28 UNEF	18,3	6,6	13,1	27,2	22,7	35,3	15,0
11	10	9/16-24 UNEF	21,5	10,1	13,9	28,0	26,2	36,8	17,0
13	12	11/16-24 UNEF	24,5	12,9	14,5	28,6	29,2	38,3	18,0
15	14	13/16-20 UNEF	27,8	16,1	15,5	29,6	32,2	39,8	20,0
17	16	15/16-20 UNEF	30,8	19,3	16,1	30,2	35,7	41,5	21,5
19	18	1 1/16-18 UNEF	34,1	21,7	16,8	30,9	39,7	43,0	23,0
21	20	1 3/16-18 UNEF	37,3	24,9	17,1	31,2	42,2	44,7	25,0
23	22	1 5/16-18 UNEF	40,5	28,1	17,7	31,8	45,2	46,2	26,0
25	24	1 7/16-18 UNEF	43,7	31,3	18,4	32,5	48,2	47,7	28,0

CONDUIT SIZE	G CABLE MAX	H MAX
13	7,7	23,0
16	9,5	26,0
21	13,4	31,0
28	17,6	38,0
34	22,4	46,0
42	28,6	56,0

CODE	PLATING
B	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
C	ELECTROLESS NICKEL
ZB	ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL

LIST NOT EXHAUSTIVE - FOR COMPREHENSIVE LIST AND SPECS SEE WEBSITE

PART NUMBER (** - SIZE)	DESCRIPTION
100P2589-N6S-**	STANDARD WEIGHT POLYAMIDE (NYLON) 6
100P2589-N11S-**	STANDARD WEIGHT MODIFIED POLYAMIDE 11
100P2589-N11H-**	HEAVYWEIGHT MODIFIED POLYAMIDE 11
100P2589-PS-**	POLYESTER
100P2589-PKS-**	POLYKETONE (PEEK)

FOR PRODUCT CHARACTERISTICS SEE 100P2589 DATASHEET

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792

