

63 SERIES CONDUIT ADAPTOR

INTERFACE: A


TO FIT TYPICAL CONNECTOR: MIL-DTL-26482 SERIES II / MIL-DTL-83723 SERIES III

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

SUITABLE FOR USE WITH 100P2589 SERIES CONDUIT

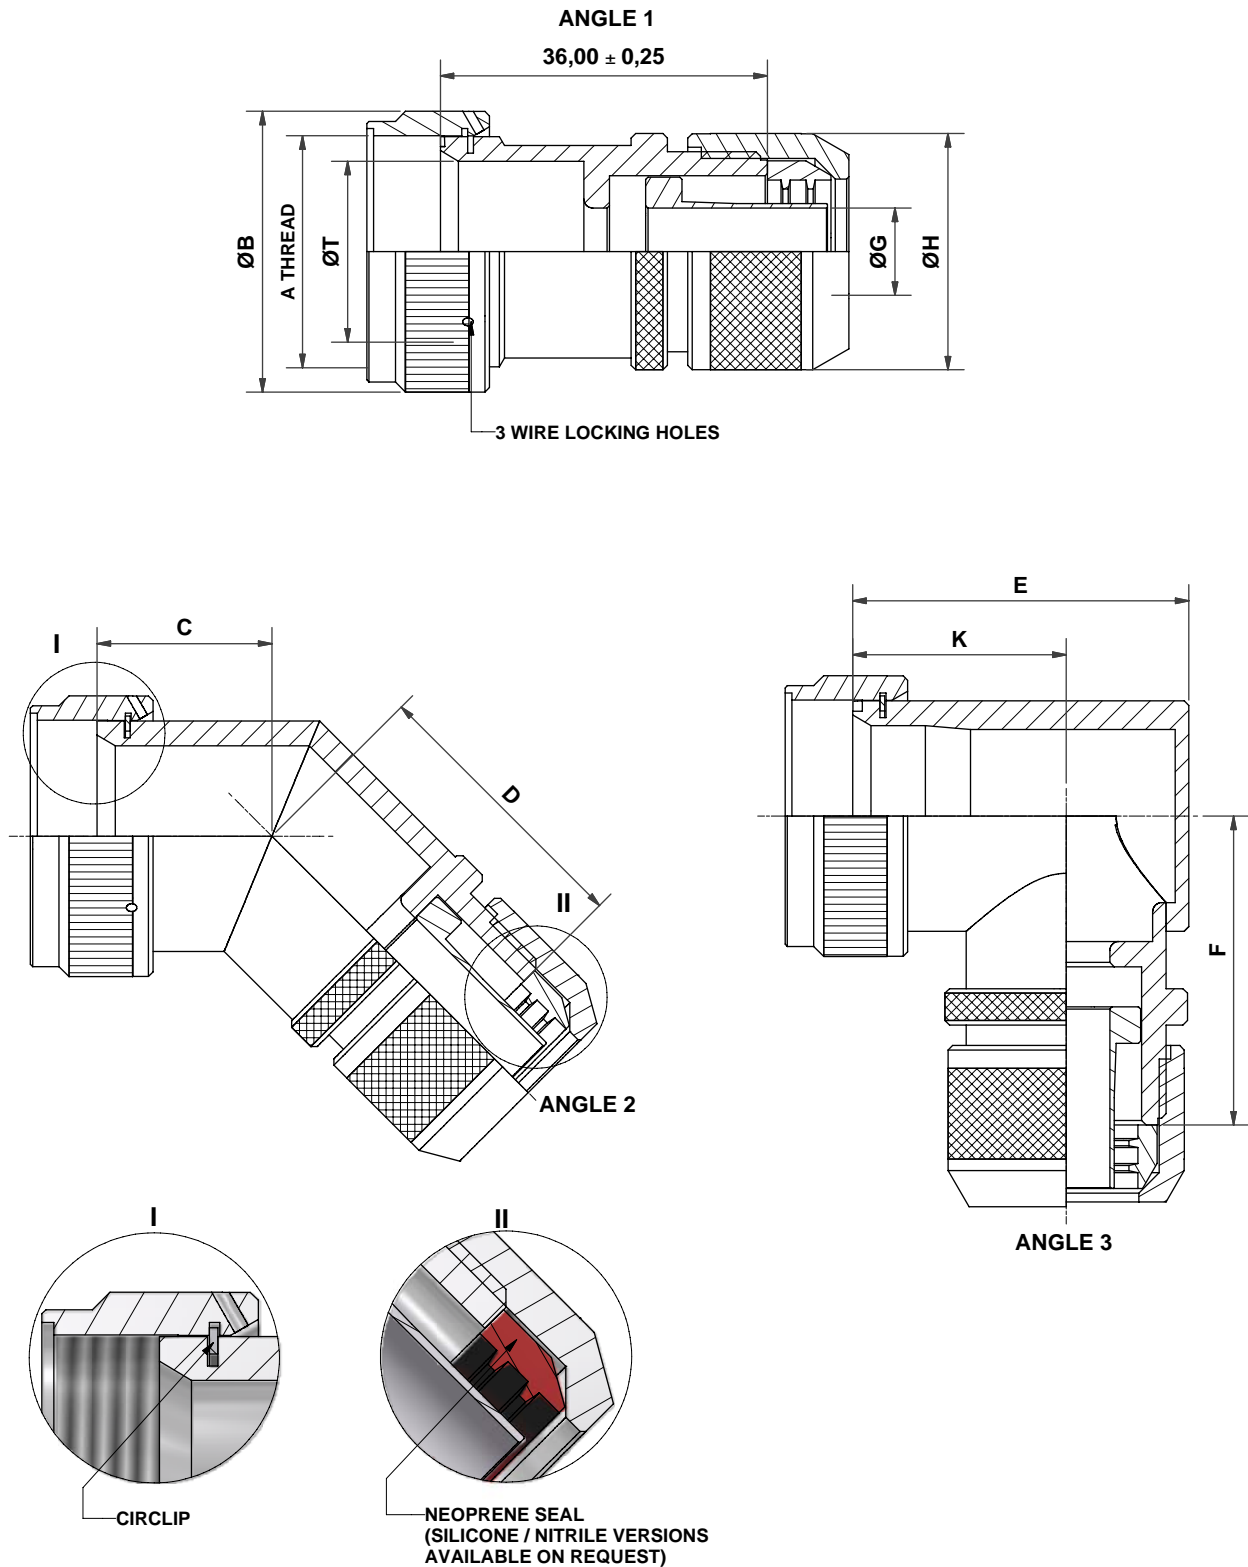

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792



63 SERIES CONDUIT ADAPTOR

INTERFACE: A

TO FIT TYPICAL CONNECTOR: MIL-DTL-26482 SERIES II / MIL-DTL-83723 SERIES III

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

EXAMPLE PART NUMBER	63	A	1	- 18	- 16	- 1	- C
SERIES							
CONNECTOR INTERFACE							
ANGLE							
SHELL SIZE (TABLE 1)							
CONDUIT SIZE (TABLE 2)							
MATERIAL (1-ALUMINIUM ALLOY)							
PLATING (TABLE 3)							

SHELL SIZE	A THREAD	B MAX	T MIN	C MAX	D MAX	E MAX	F MAX	K +/- 0,5
08	1/2-20 UNF	15,6	6,5	16,8	27,2	24,8	35,3	17,5
10	5/8-24 UNEF	18,6	9,2	17,0	28,0	26,8	36,8	17,8
12	3/4-20 UNEF	21,7	12,7	17,5	28,6	29,3	38,3	18,7
14	7/8-20 UNEF	24,9	14,6	18,3	29,6	30,8	39,8	19,0
16	1-20 UNEF	28,2	17,7	19,2	30,2	34,3	41,5	21,0
18	1 1/16-18 UNEF	30,9	19,7	19,4	30,9	38,5	43,0	23,5
20	1 3/16-18 UNEF	34,1	22,9	20,3	31,2	40,0	44,7	27,0
22	1 5/16-18 UNEF	37,3	26,1	20,5	31,8	41,7	46,2	27,0
24	1 7/16-18 UNEF	40,4	29,0	22,0	32,5	43,2	47,7	27,0

CONDUIT SIZE	G CABLE MAX	H MAX
13	7,7	23,0
16	9,5	26,0
21	13,4	31,0
28	17,6	38,0
34	22,4	46,0
42	28,6	56,0

CODE	PLATING
B	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
C	ELECTROLESS NICKEL
ZB	ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL

LIST NOT EXHAUSTIVE - FOR COMPREHENSIVE LIST AND SPECS SEE WEBSITE

PART NUMBER (** - SIZE)	DESCRIPTION
100P2589-N6S-**	STANDARD WEIGHT POLYAMIDE (NYLON) 6
100P2589-N11S-**	STANDARD WEIGHT MODIFIED POLYAMIDE 11
100P2589-N11H-**	HEAVYWEIGHT MODIFIED POLYAMIDE 11
100P2589-PS-**	POLYESTER
100P2589-PKS-**	POLYKETONE (PEEK)

FOR PRODUCT CHARACTERISTICS SEE 100P2589 DATASHEET

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792

