


3RD ANGLE PROJECTION



REMOVE ALL SHARP EDGES AND BURRS

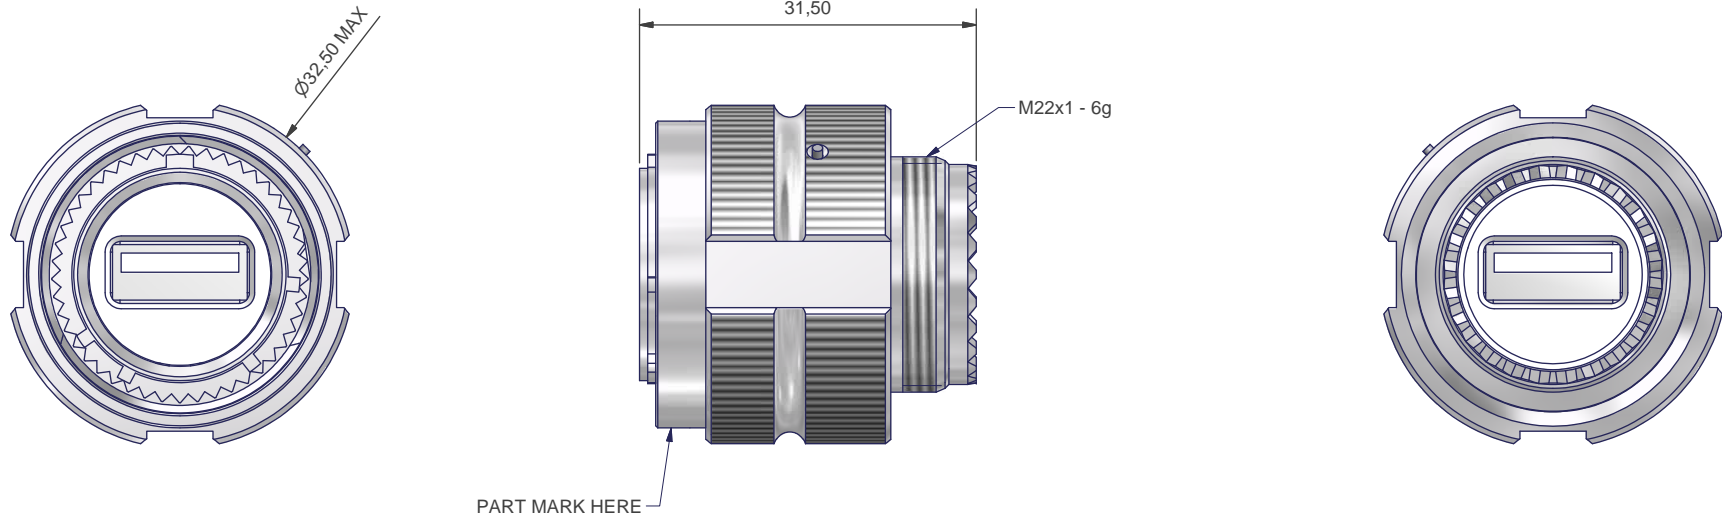

NOTES
GENERALLY TO THE REQUIREMENTS OF MIL-DTL-38999

FINISH
SEE TABLE
MATERIALS
SHELL OPTIONS
1 = ALUM ALLOY 6262R
2 = ALUM BRONZE NES833
4 = STAINLESS STEEL 303
46 = STAINLESS STEEL 316

SEAL - FLUORO SILICONE

PERFORMANCE
CURRENT RATING 1 AMP MAX PER CONTACT
VOLTAGE RATING 30V AC MAX
TEMPERATURE -25°C TO +85°C

CODE	DESCRIPTION
B	Cadmium, olive drab (5-10 microns) QQ-P-416, Type II, Class 3 over electroless nickel (2.5 - 7.5 microns) (500 hour salt spray finish)
C	Electroless Nickel, MIL-C-26074, Class 4, Grade B
J	Passivate, per QQ-P-35 or MI-S-5002
P	Heavy Nickel, 500 hour salt spray
Z	Shot blast for non-reflective finish
ZB	Zinc cobalt, olive drab (5-10 microns) over electroless nickel (2.5 - 7.5 microns)

ORDERS CANNOT BE PLACED AGAINST ALPHA ISSUE DRAWINGS.
ON RECEIPT OF CUSTOMER APPROVAL, THE DRAWING STATUS WILL RAISE TO ISSUE 1.

PC4D0022-15N-1-C

SERIES _____
SHELL SIZE _____
ALTERNATE KEYING (N, A, B, C, D, E) _____
MATERIAL SEE NOTES FOR OPTIONS _____
PLATING _____

ISSUE	DCR NO.	DATE	APPROVED	MATERIAL	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES TOLERANCE ON DIMENSIONS +/-0.1MM TOLERANCE ON ANGLES +/- 1 DEGREE	DO NOT SCALE THIS DRAWING	POLAMCO LTD WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	PART NO PC4D0022-15N-1-C
A		04/01/2010	MP			THIS DRAWING IS COPYRIGHT, AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	TITLE USB A RECEPTACLE FEEDTROUGH PLUG ASSEMBLY	ASSY USED ON D38999/26 USB A
					WEIGHT			DRAWING NO C1990
					DRAWN	M.PAUL		