

36 SERIES

RFI/EMI CABLE SEALING ADAPTOR


INTERFACE: F

TO FIT TYPICAL CONNECTOR: MIL-DTL-38999 SERIES I & II

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

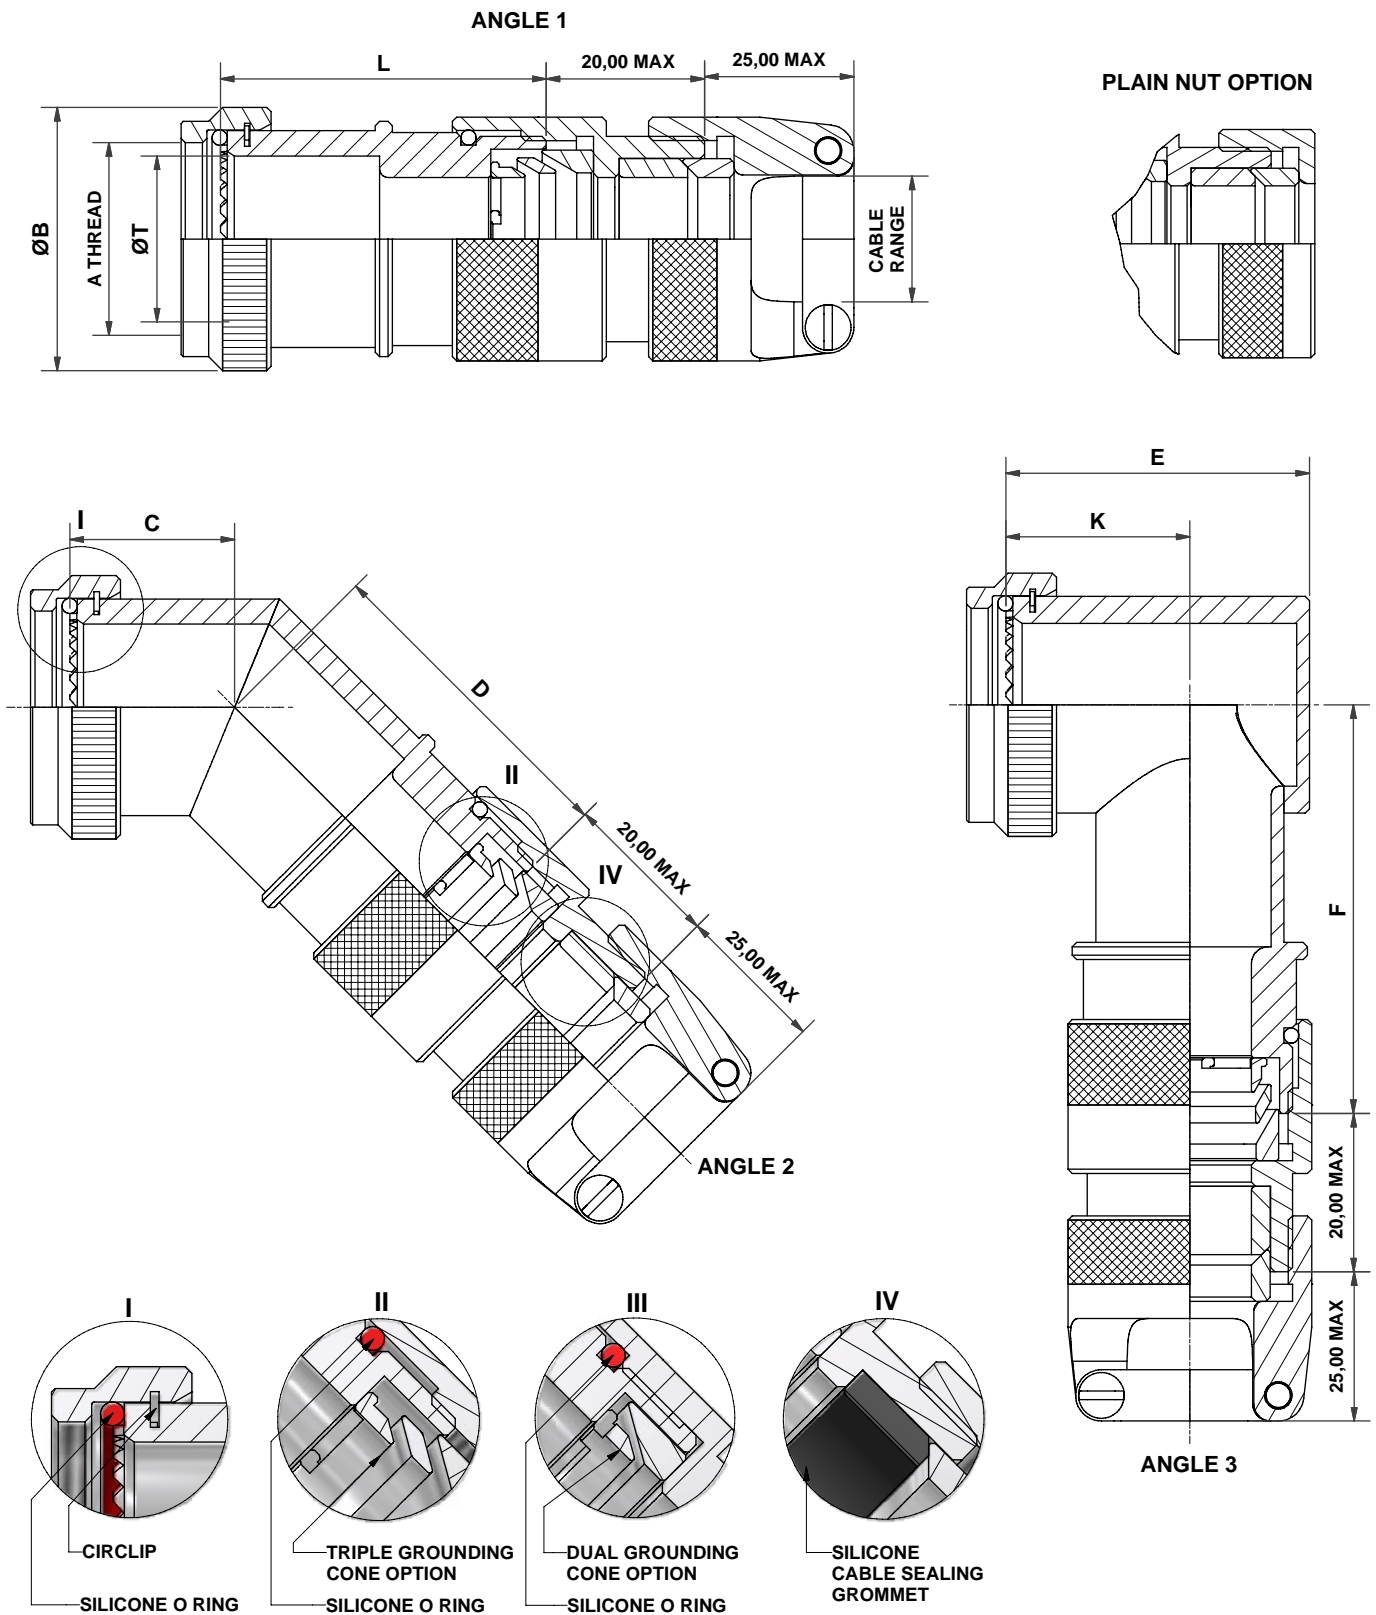

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792



36 SERIES

RFI/EMI CABLE SEALING ADAPTOR

INTERFACE: F

TO FIT TYPICAL CONNECTOR: MIL-DTL-38999 SERIES I & II

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

EXAMPLE PART NUMBER	36	F	1	- 16	- 08	- 1	- C	- CC	- L3	- T
SERIES										
CONNECTOR INTERFACE										
ANGLE										
SHELL SIZE (TABLE 1)										
ENTRY SIZE (TABLE 2)										
MATERIAL (1-ALUMINIUM ALLOY)										
PLATING (TABLE 3)										
CABLE CLAMP OPTION										
LENGTH CODE (STRAIGHT ONLY) (1/2" INCREMENTS, MINIMUM L2 (= 1"))										
(D-DUAL CONE, T-TRIPLE CONE) GROUNDING CONE OPTION										

SHELL SIZE		A	B	T	MAX	C	D	E	F	K
SERIES I	SERIES II	THREAD	MAX	MIN	ENTRY	MAX	MAX	MAX	MAX	+/- 0,5
9	8	7/16-28 UNEF	18,3	6,6	-	16,6	35,8	22,7	36,1	15,0
11	10	9/16-24 UNEF	21,5	10,1	04	17,4	37,3	26,2	39,1	17,0
13	12	11/16-24 UNEF	24,5	12,9	06	17,8	38,9	29,2	39,6	18,0
15	14	13/16-20 UNEF	27,8	16,1	10	18,7	41,1	32,2	41,4	20,0
17	16	15/16-20 UNEF	30,8	19,3	12	20,4	43,9	35,7	48,0	21,5
19	18	1 1/16-18 UNEF	34,1	21,7	12	19,8	48,8	39,7	50,8	23,0
21	20	1 3/16-18 UNEF	37,3	24,9	16	20,6	50,1	42,2	50,8	25,0
23	22	1 5/16-18 UNEF	40,5	28,1	16	21,0	52,6	45,2	50,8	26,0
25	24	1 7/16-18 UNEF	43,7	31,3	16	21,9	54,0	48,2	50,8	28,0

ENTRY SIZE	CABLE RANGE
04	3,2 - 7,9
06	6,4 - 11,1
08	9,8 - 14,3
10	8,9 - 15,9
12	12,7 - 19,1
16	15,9 - 23,8
20	22,2 - 31,8
24	25,4 - 34,9
28	31,8 - 41,3
32	36,5 - 47,6

CODE	PLATING
B	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
C	ELECTROLESS NICKEL
ZB	ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL

LIST NOT EXHAUSTIVE - FOR COMPREHENSIVE LIST AND SPECS SEE WEBSITE

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792

