

39 SERIES

RFI/EMI CABLE SEALING ADAPTOR


INTERFACE: D

TO FIT TYPICAL CONNECTOR: MIL-DTL-26482 SER I, PATT 105, PATT 603

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

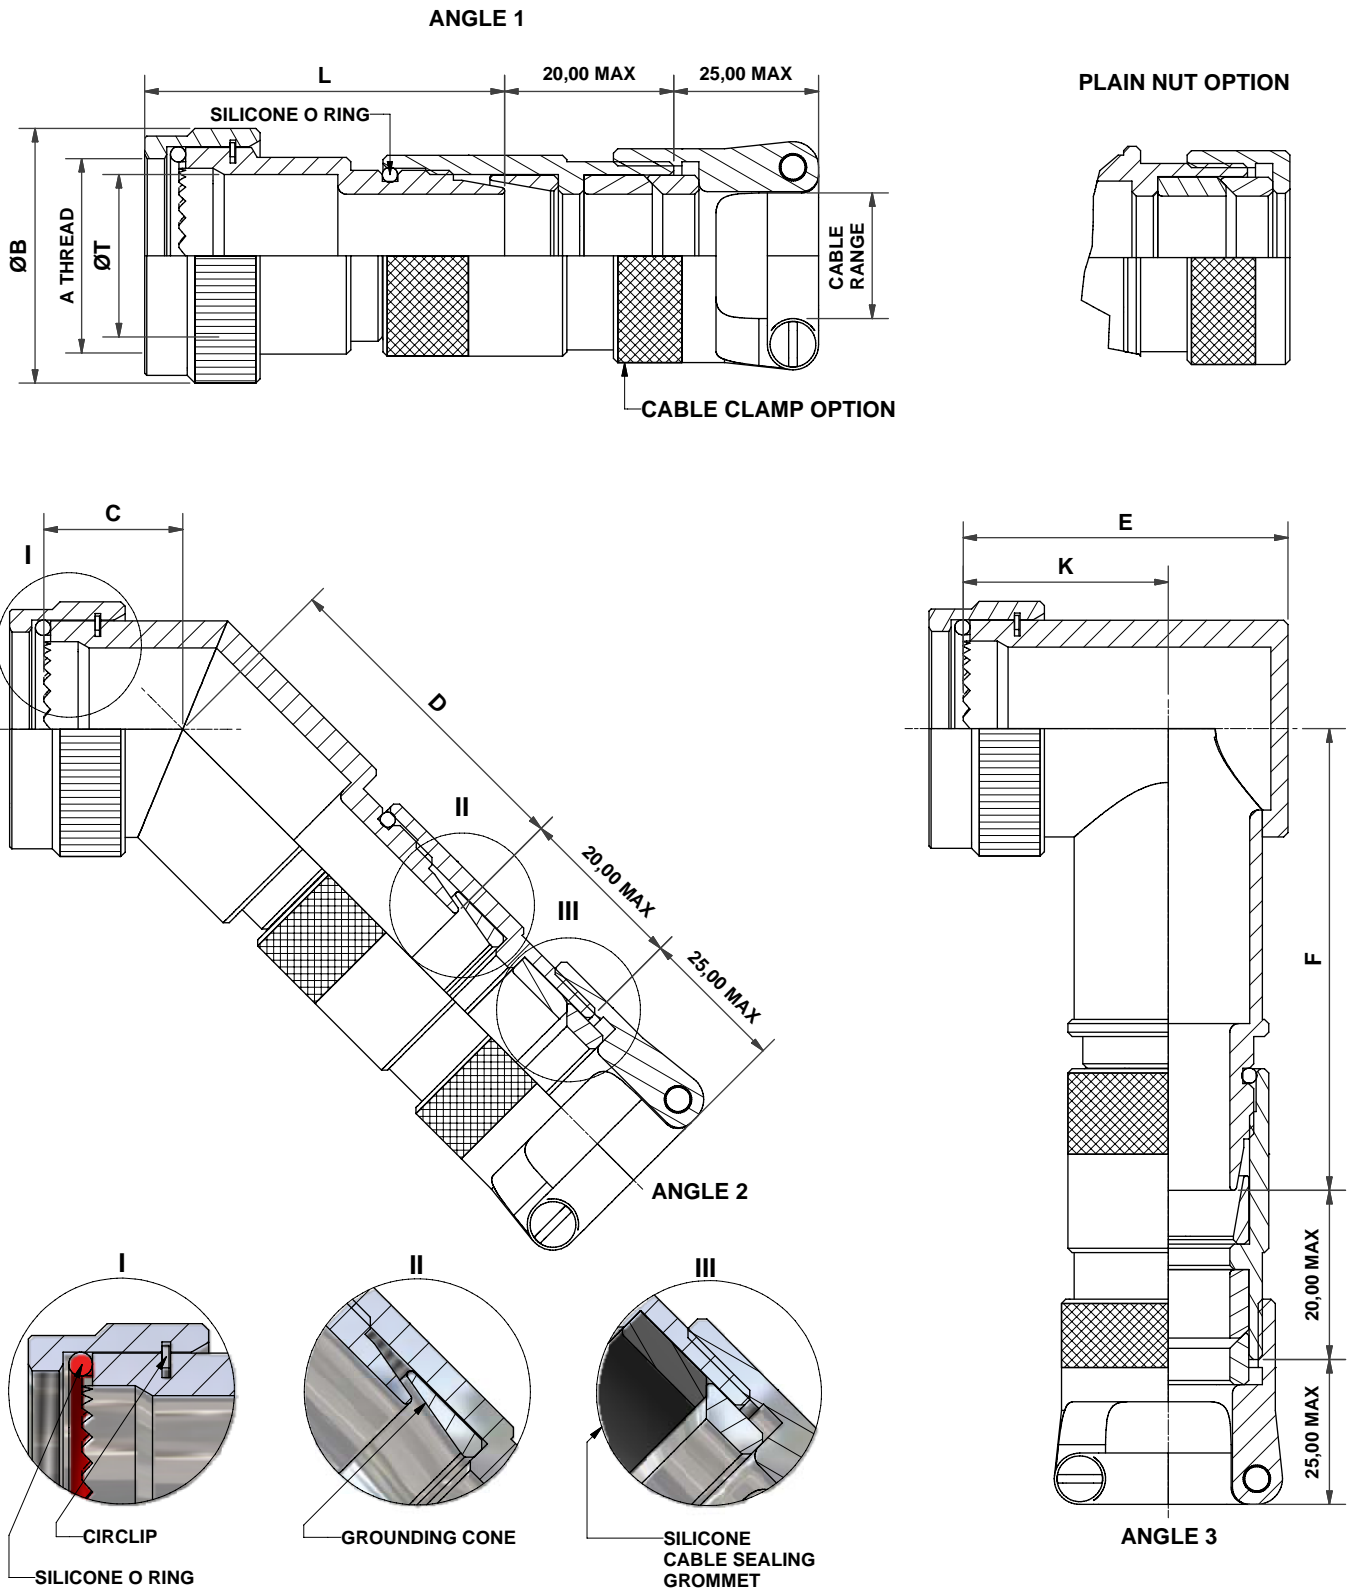

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792



39 SERIES

RFI/EMI CABLE SEALING ADAPTOR

INTERFACE: D

TO FIT TYPICAL CONNECTOR: MIL-DTL-26482 SER I, PATT 105, PATT 603

For modifications see page:



➤ Visit our on-line catalogue or contact sales on ➤ www.polamco.com ➤ sales@polamco.co.uk

EXAMPLE PART NUMBER	39	D	1	- 16	- 08	- 1	- C	- CC	- L3
SERIES									
CONNECTOR INTERFACE									
ANGLE									
SHELL SIZE (TABLE 1)									
ENTRY SIZE (TABLE 2)									
MATERIAL (1-ALUMINIUM ALLOY)									
PLATING (TABLE 3)									
CABLE CLAMP OPTION									
LENGTH CODE (STRAIGHT ONLY) (1/2" INCREMENTS, MINIMUM L2 (= 1"))									

SHELL SIZE	A THREAD	B MAX	T MIN	MAX ENTRY	C MAX	D MAX	E MAX	F MAX	K +/- 0,5
08	7/16-28 UNEF	17,3	7,2	-	14,1	30,5	25,0	39,2	17,5
10	9/16-24 UNEF	20,3	9,8	04	14,9	30,5	28,0	42,3	18,6
12	11/16-24 UNEF	23,8	13,5	06	15,3	32,5	31,5	42,8	20,5
14	13/16-20 UNEF	26,8	15,9	10	16,2	40,3	35,0	50,5	22,5
16	15/16-20 UNEF	29,8	19,0	12	16,5	43,1	38,0	52,8	24,0
18	1 1/16-18 UNEF	33,3	21,4	12	17,3	47,9	41,5	57,1	26,0
20	1 3/16-18 UNEF	36,3	24,6	16	18,2	47,9	45,0	57,1	28,0
22	1 5/16-18 UNEF	39,8	27,8	16	18,5	56,5	48,0	64,7	29,5
24	1 7/16-18 UNEF	42,8	31,0	16	19,4	56,5	51,0	64,7	31,0

ENTRY SIZE	CABLE RANGE
04	3,2 - 7,9
06	6,4 - 11,1
08	9,8 - 14,3
10	8,9 - 15,9
12	12,7 - 19,1
16	15,9 - 23,8
20	22,2 - 31,8
24	25,4 - 34,9
28	31,8 - 41,3
32	36,5 - 47,6

CODE	PLATING
B	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
C	ELECTROLESS NICKEL
ZB	ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL

LIST NOT EXHAUSTIVE - FOR COMPREHENSIVE LIST AND SPECS SEE WEBSITE

DRAWING NOT TO SCALE
DIMENSIONS IN MM

NCAGE CODE U5792

